



**INSTRUCTION MANUAL**

**COUPLING/DECOUPLING**

**NETWORK T2**

**MODEL EM-7805**

# INSTRUCTION MANUAL

**THIS INSTRUCTION MANUAL AND ITS ASSOCIATED INFORMATION IS PROPRIETARY. UNAUTHORIZED REPRODUCTION IS FORBIDDEN.**

**© 1996 ELECTRO-METRICS CORP.**

## COUPLING/DECOUPLING NETWORK T2

**ELECTRO-METRICS**

**MODEL EM-7805**

**SERIAL NO: N/A**

**ELECTRO-METRICS CORPORATION**

**231 Enterprise Road, Johnstown, New York 12095**

**Phone: (518) 762-2600**

**Fax: (518) 762-2812**

**EMAIL: [info@emihq.com](mailto:info@emihq.com)**

**WEB: <http://www.electro-metrics.com>**

**MANUAL REV. NO: EM7805-0796**

**ISSUE DATE: JULY 01 1996**

# **WARRANTY**

**This Model EM-7805 Coupling/Decoupling Network T2 is warranted for a period of 12 months (USA only) from date of shipment against defective materials and workmanship. This warranty is limited to the repair of or replacement of defective parts and is void if unauthorized repair or modification is attempted. Repairs for damage due to misuse or abnormal operating conditions will be performed at the factory and will be billed at our commercial hourly rates. Our estimate will be provided before the work is started.**

---

**TABLE OF CONTENTS**


---

<b>SECTION</b>	<b>TITLE</b>	<b>PAGE</b>
A-1	Appendix A: List Of Accessories	A-1
1.0	Introduction	1
2.0	Specifications	1
3.0	Description EM-7805	2
4.0	Operating Instructions	2
5.0	Reference Information	3

---

**LIST OF ILLUSTRATIONS**


---

<b>FIGURE</b>	<b>TITLE</b>	<b>PAGE</b>
1	Schematic Diagram EM-7805	4

## APPENDIX 1 EM-7805 ACCESSORIES

The following accessories are standard with the **EM-7805 Coupling/Decoupling Network T2**.

- a.** 50-ohm Termination, BNC Connector.
- b.** Four (4) Banana Plug Connectors:
  - INPUT: 2
  - OUTPUT: 2
- c.** 50/150-ohm Impedance Matching Network.
  - Quantity: 2
- d.** 6 dB Attenuator

**DESCRIPTION AND USE  
COUPLING/DECOUPLING NETWORK T2  
ELECTRO-METRICS MODEL EM-7805**

## 1.0 Introduction

The EM-7805 Coupling/Decoupling Network T2 is a low pass filter network that allows coupling of RF signals onto the unshielded (unscreened) cabling of a device being tested to IEC-1000-4-6 (formerly IEC 801.6).

The EM-7805 is used for conducted susceptibility testing of 2-line unshielded cabling with balanced lines. The network is designed to be fully compliant with IEC-1000-4-6.

Included with each unit, as required by IEC-1000-4-6:

- a. High power 6 dB attenuator, quantity: 1,
- b. 50/150-ohm matching networks, quantity: 2.

## 2.0 Specifications

### 2.1 Electrical

Injection Frequency Range:	150 kHz-80 MHz
Current:	1 Ampere AC/DC.
Voltage:	50 V AC/DC.
Injection Port Voltage:	20 Vrms.
Connectors:	Injection Port: BNC Input/Output: Banana Jack Connector
Grounding Connector:	Threaded Stud.

### 2.2 Mechanical

Height:	100 mm (3.95")
Length:	218 mm (8.6")
Over Ground Stud:	239 mm (9.4")
Width:	171 mm (6.75")
Weight:	1.5 kg (3.25 lbs)

### 3.0 Description EM-7805

The two end panels for the EM-7805 Network are marked:

- a. Auxiliary Equipment (AE),
- b. Equipment Under Test (EUT).

#### 3.1 Auxiliary Equipment Panel

##### a. Input Connectors

**Type:** Banana Jack.

**Quantity:** 2.

**Color:** Red, Black

**Function:** To connect to the 2-line unshielded cabling.

##### b. Ground Connector

**Type:** Brass Stud.

**Quantity:** 1.

**Function:** To connect to the ground plane or shielded enclosure.

#### 3.2 Equipment Under Test Panel

##### a. Output Connectors

**Type:** Banana Jack.

**Quantity:** 2.

**Color:** Red, Black.

**Function:** To connect to the Equipment Under Test 2-line unshielded cabling input.

### 4.0 Operating Instructions

The AE (Auxiliary Equipment) panel of the network should be connected to the unshielded cabling using the two banana plugs provided. Attach these plugs to the banana jacks located on the AE panel. The ground connection should be made through the brass stud (marked GND) on the AE panel.

**NOTE**

**A BRASS RF GROUND STUD IS PROVIDED ON THE AE PANEL FOR CONNECTION TO THE GROUND PLANE.**

The EUT (Equipment Under Test) panel of the network should be connected to the device under test using the two banana plugs provided.

The RF test signal at the required level is applied to the BNC connector (top panel) on the EUT end of the network. The signal is normally applied through the 6 dB attenuator (supplied).

**5.0 Reference Information**


The design of the EM-7805 Coupling/Decoupling Network T2 is based on the information contained in International Electrotechnical Commission Publication IEC 1000-4-6 (Para. 6.2).

The application and verification of the coupling/decoupling network is explained in detail by the IEC publication. For any questions concerning the use of the network, 50/150-ohm impedance matching network, or procedures to be followed refer to the IEC publication.

INJECTION  
PORT





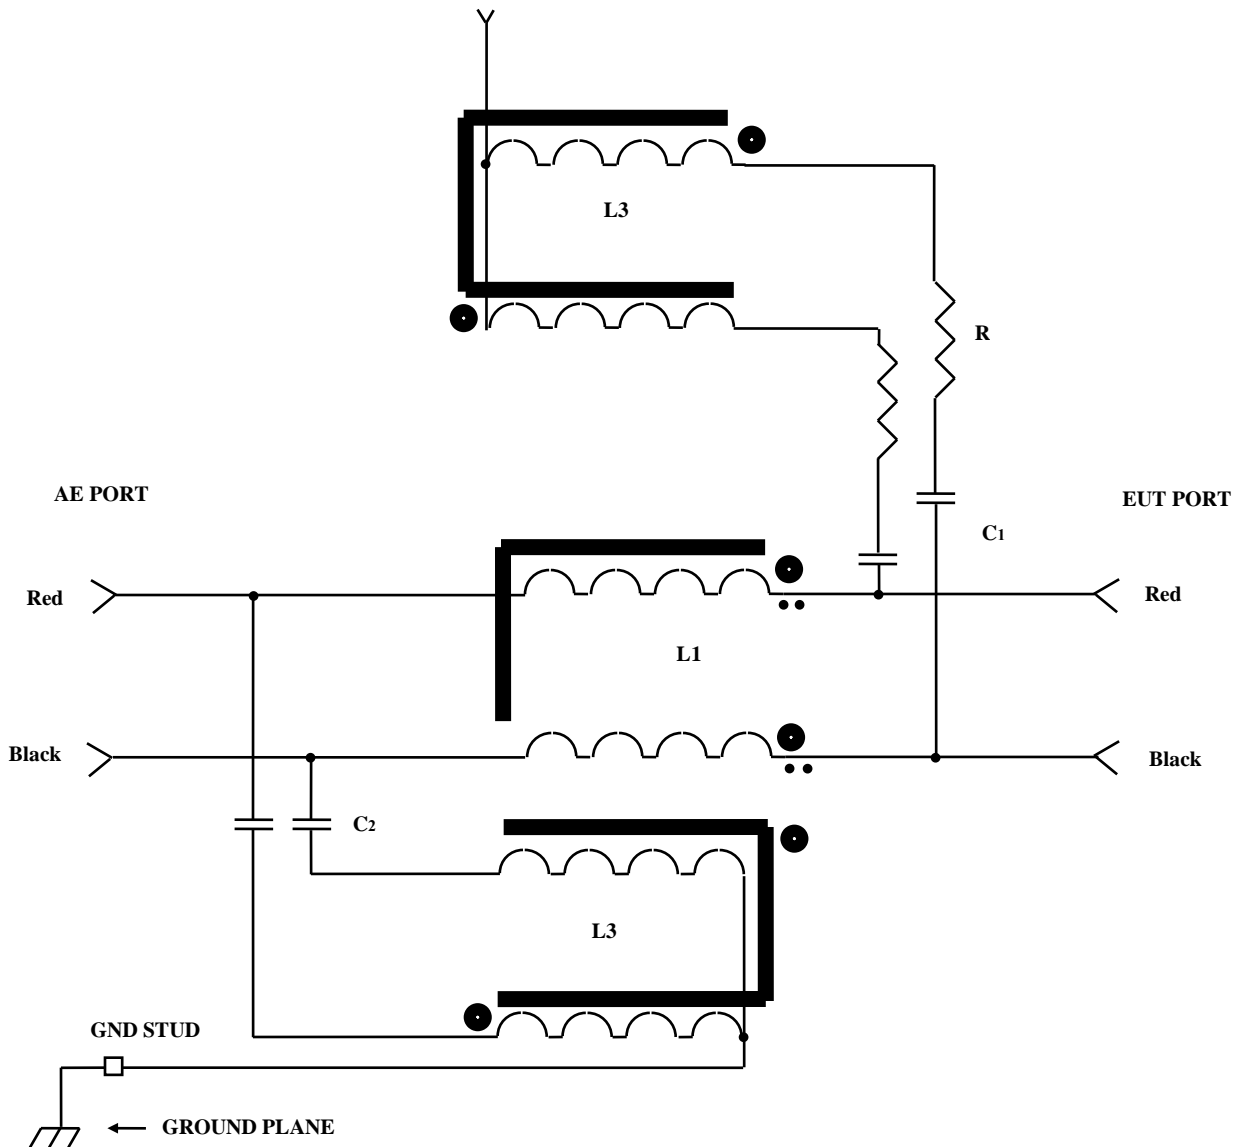

**NOTE:**  $C1 = 0.01 \mu\text{F}$  (typ.),  $C2 = 0.047 \mu\text{F}$  (typ.),  $R = 200 \Omega$ ,  $L1 = 684 \mu\text{H}$ ,  $L2 = L3 = 6 \text{ mH}$  (When  $C2$  and  $L3$  not used,  $L1 = 280 \mu\text{H}$ ).  
 Ferrite Beads - as required.

**Figure 1**

**Schematic Diagram EM-7805 Coupling/Decoupling Network T2**