


EM-6244 | Antenna, Directional 4x4 MIMO Slant Left/Right



Description

The EM-6244 is a compact, directional 4x4 MIMO antenna covering 1.6–2.7 GHz, designed for reliable, high-performance wireless connectivity. Supporting MANET radios, Wi-Fi, and cellular frequency bands, it delivers improved throughput, extended range, and enhanced link quality across tactical and commercial applications.

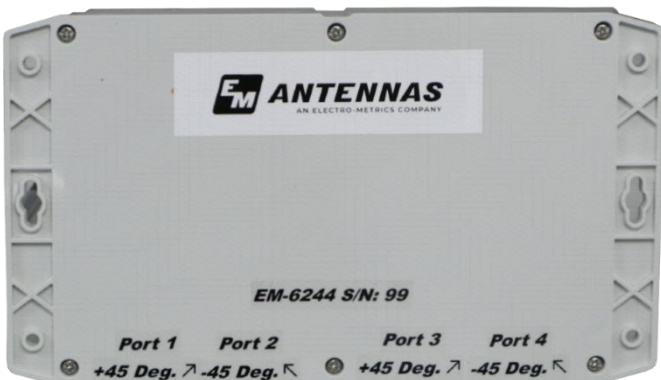

Specifications

Electrical

Frequency Range: 1.6GHz – 2.7GHz

Polarization: +/- 45° Slant Left/Right

VSWR: 2:1 Max, <1.5:1 Average

3dB Beamwidth: Azimuth 60° Typical

Elevation 60° Typical

Impedance: 50Ω, Nominal

Gain: 7dBi Typical

Isolation: -25dB Typical

Max Power: 15W CW

Connector: TNC Female (EM-6244 | 1.6-2.7GHz)

Type 'N' Female (EM-6244 -1 | 1.6-2.7GHz)

SMA Female (EM-6244-2 | 1.6-2.7GHz)

Mechanical

Dimensions:

Height: 6.25 in. (15.9 cm)

Width: 11.0 in. (28.0 cm)

Depth: 2.5 in. (6.4 cm)

Weight: 2.1 lbs. (0.95 kg)

Mounting Options Available:

-8/32 Flange for Wall Mount



Color Options:

- Light Gray (default)
- Custom colors available upon request

Specifications subject to change without notice, unless otherwise specified. Product is manufactured in Johnstown, NY, U.S.A.



EM-6244 | Antenna, Directional 4x4 MIMO Slant Left/Right

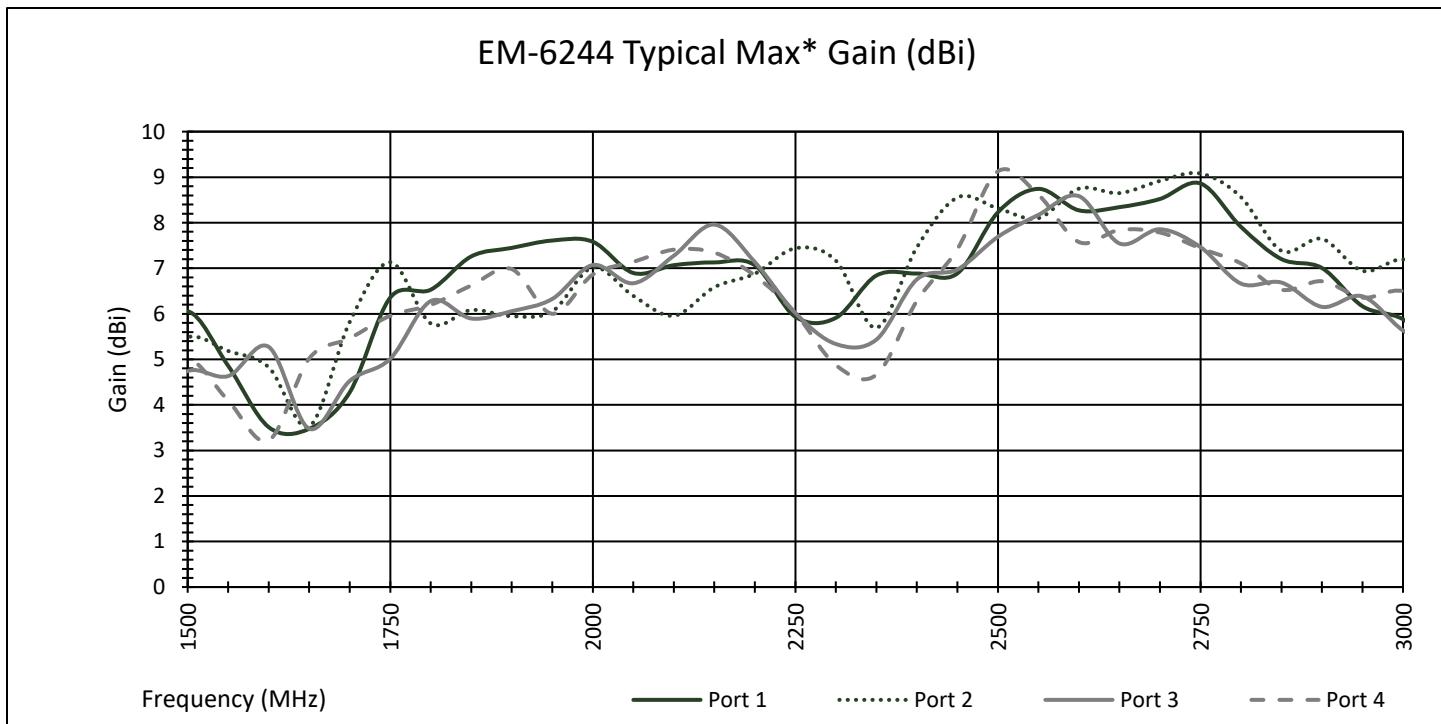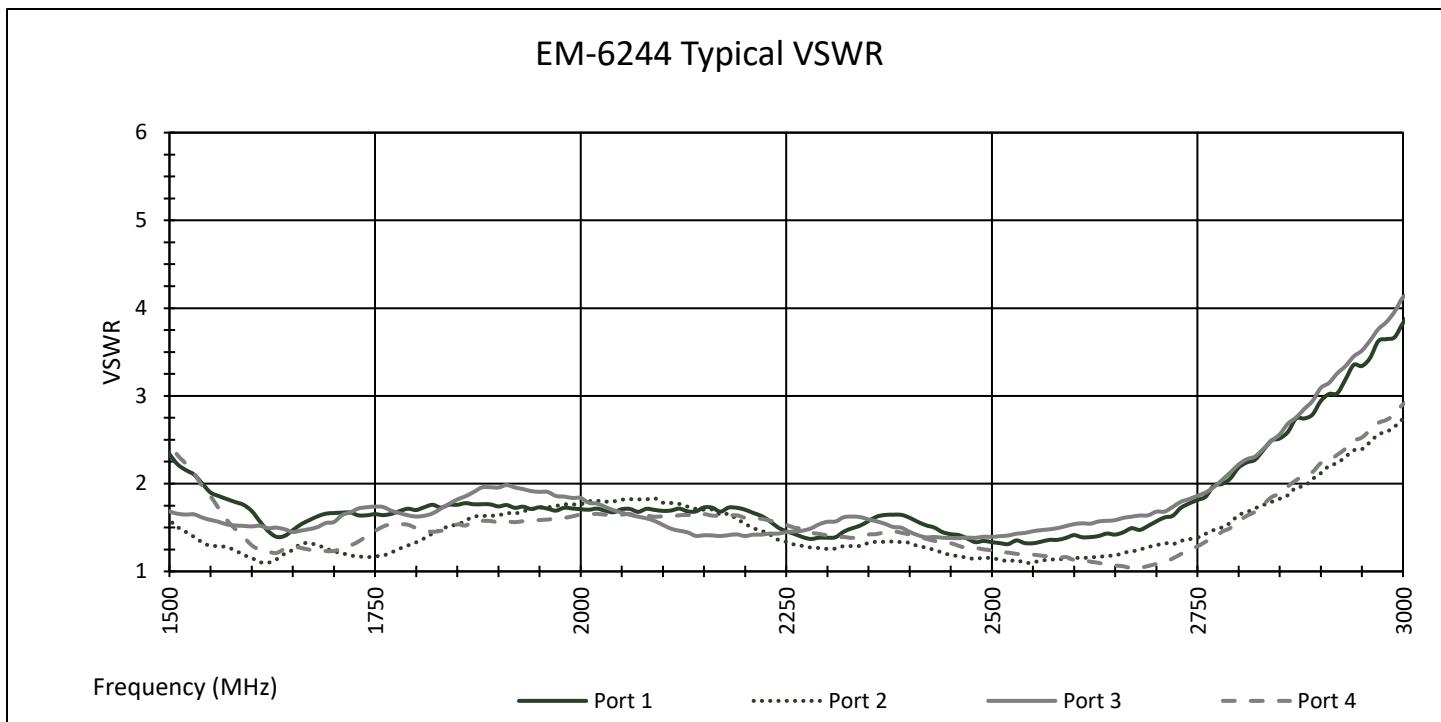


Specifications subject to change without notice, unless otherwise specified. Product is manufactured in Johnstown, NY, U.S.A.

*Maximum Gain determined from scans at all radiation angles and elevations. Data shown is typical, not guaranteed.




EM-6244 | Antenna, Directional 4x4 MIMO Slant Left/Right

EM-6244 Azimuth 3dB Beamwidth

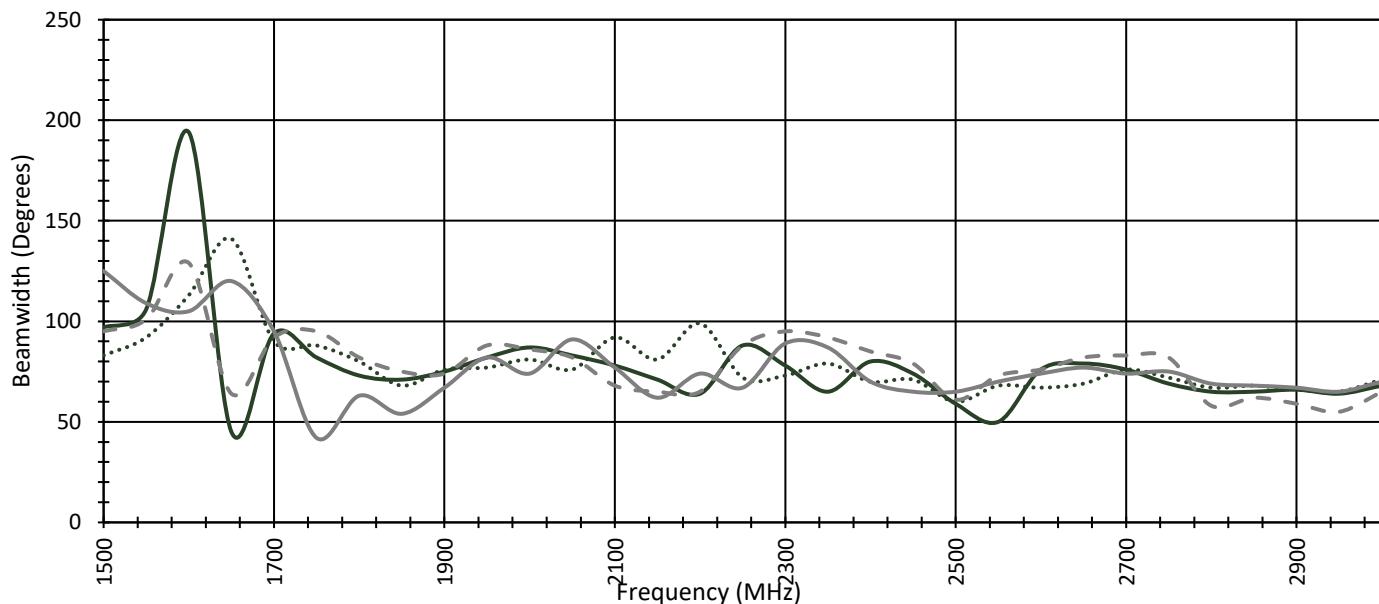

EM-6244 Elevation 3dB Beamwidth

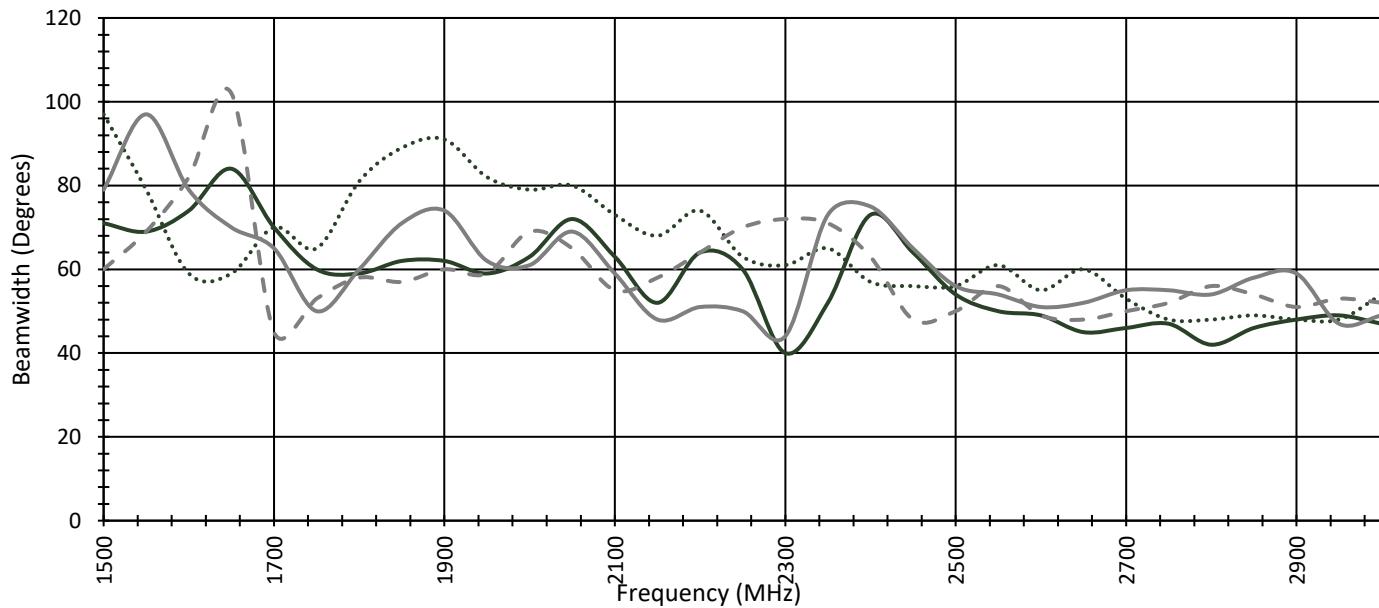

Specifications subject to change without notice, unless otherwise specified. Product is manufactured in Johnstown, NY, U.S.A.

Data shown is typical, not guaranteed.

